




SunPrimo PM060PW I

Multi-Crystalline Photovoltaic Module

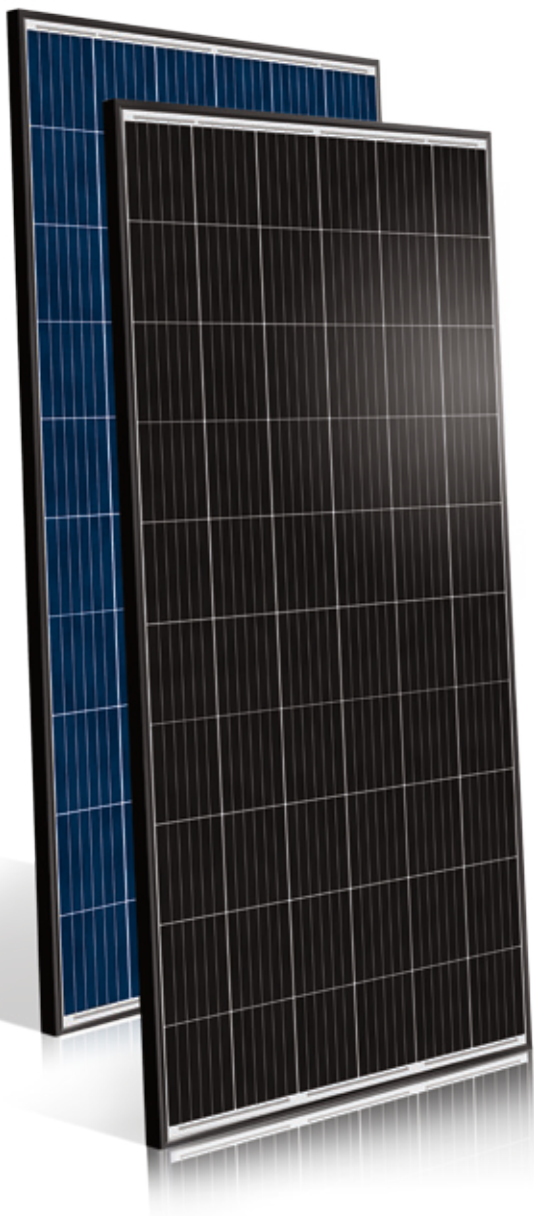

Power Range
250 ~ 270 Wp



Strong Wind Resistance
Dynamic mechanical loading 4 times higher
than the IEC requirement



Flammability Test
Low ignitability ensuring fire safety



PID-Resistance
Certified high PID resistance passing 1000-hour
tough environmental test



Resistance to Salt Corrosion and Humidity
Module complies with IEC 61701: Salt Mist
Corrosion Testing



Ammonia Test
Reliable in ammonia rich environment



SunPrimo PM060PW I (250 ~ 270 Wp)

Electrical Data (STC)

	250W	255W	260W	265W	270W
Nominal Power P_N	250W	255W	260W	265W	270W
Module Efficiency	15.4%	15.7%	16.0%	16.3%	16.6%
Nominal Voltage V_{mp} (V)	30.6	30.8	31.2	31.7	31.8
Nominal Current I_{mp} (A)	8.17	8.28	8.34	8.36	8.50
Open Circuit Voltage V_{oc} (V)	37.4	37.6	37.7	37.9	38.0
Short Circuit Current I_{sc} (A)	8.69	8.76	8.83	8.89	8.95
Maximum Tolerance of P_N	0 / +3%				

* Above data are the effective measurement at Standard Test Conditions (STC)
 * STC: irradiance 1000 W/m², spectral distribution AM 1.5, temperature 25 ± 2 °C, in accordance with EN 60904-3

Electrical Data (NOCT)

	184W	188W	192W	196W	199W
Nominal Power P_N	184W	188W	192W	196W	199W
Nominal Voltage V_{mp} (V)	28.1%	28.3%	28.7%	29.2%	29.3%
Nominal Current I_{mp} (A)	6.55	6.64	6.69	6.70	6.81
Open Circuit Voltage V_{oc} (V)	34.7	34.9	35.0	35.2	35.2
Short Circuit Current I_{sc} (A)	7.07	7.12	7.18	7.22	7.27

* Above data are the effective measurement at Normal Operation Cell Temperature (NOCT)
 * NOCT: irradiance 800 W/m², AM 1.5, air temperature 20 °C, wind speed 1 m/s

Temperature Coefficient

NOCT	46 ± 2 °C
Typ. Temperature Coefficient of P_N	-0.39% / K
Typ. Temperature Coefficient of V_{oc}	-0.30% / K
Temperature Coefficient of I_{sc}	0.07% / K

Mechanical Characteristics

Dimensions (L x W x H)	1640 x 992 x 40 mm (64.57 x 39.05 x 1.57 in)*
Weight	18.5 kg (40.79 lbs)
Front Glass	High transparent solar glass (tempered), 3.2 mm (0.13 in)
Cell	60 multicrystalline solar cells
Back Sheet	Composite film
Frame	Anodized aluminum frame
Junction Box	IP-68 rated with 3 bypass diodes
Connector Type	MC4 KST4/KBT4: 1 x 4 mm ² (0.04 x 0.16 in ²)

* Module Dimension (L x W) Tolerance: ± 2 mm (0.079 in)

Operating Conditions

Operating Temperature	-40 ~ +85 °C
Ambient Temperature Range	-40 ~ +45 °C
Max. System Voltage	1000 V / 1500 V
Serial Fuse Rating	15 A
Max. Snow / Wind Load	5400 Pa / 2400 Pa
Max. Dynamic Mechanical Load	4000 Pa

Warranties and Certifications


Product Warranty	Maximum 12 years for material and workmanship
Performance Guarantee	Guaranteed linear degradation to 80% for 25 years*1
Certifications	According to IEC/EN 61215, IEC/EN 61730 and UL 1703 guidelines*2

*1: Please refer to warranty letter for detail
 *2: Please confirm other certifications with official dealers


Packing Configuration

Container	20' GP	40' GP	40' HQ
Pieces per Pallet	26	26	26
Pallets per Container	6	14	28
Pieces per Container	156	364	728

Dimensions mm (inch)

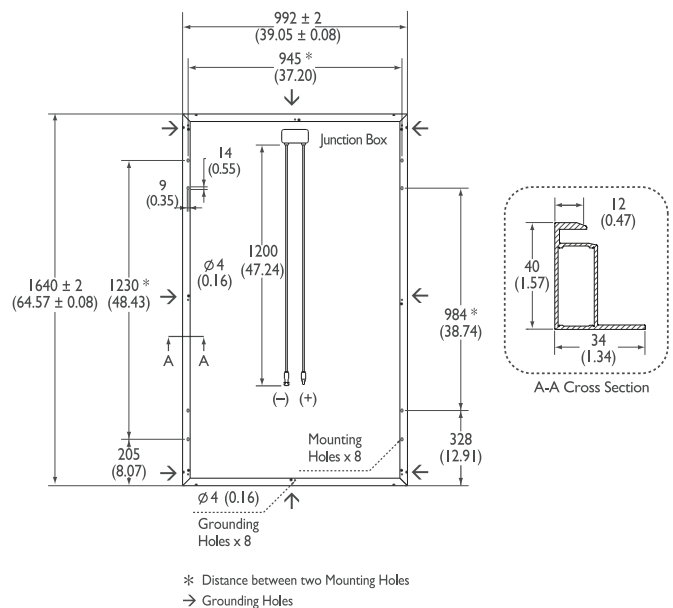

I-V Curve

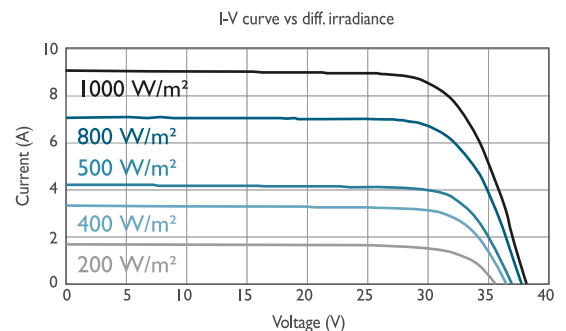

Current/voltage characteristics with dependence on irradiance and module temperature.



About AU Optronics

AU Optronics (AUO) is a leading global manufacturer of TFT-LCD committed to providing green solutions to its worldwide customers in a manner that is sustainable and friendly to the environment. In addition to its strengths in product and technological innovation, AUO stresses its commitment to going green and to utilizing manufacturing excellence to develop high efficiency solar solutions for residential, commercial, and utility segments.



AU Optronics Corporation
 No. 1, Li-Hsin Rd. 2, Hsinchu Science Park, Hsinchu 30078, Taiwan
 Tel: +886-3-500-8899 solar.AUO.com

© Copyright October 2017 AU Optronics Corp. All rights reserved. Information may change without notice. This datasheet is printed with Soy Ink.